





NON SLIP FLOOR TILES
 GLY VRY VLOER TEËLS


UNIGRIP E.J.

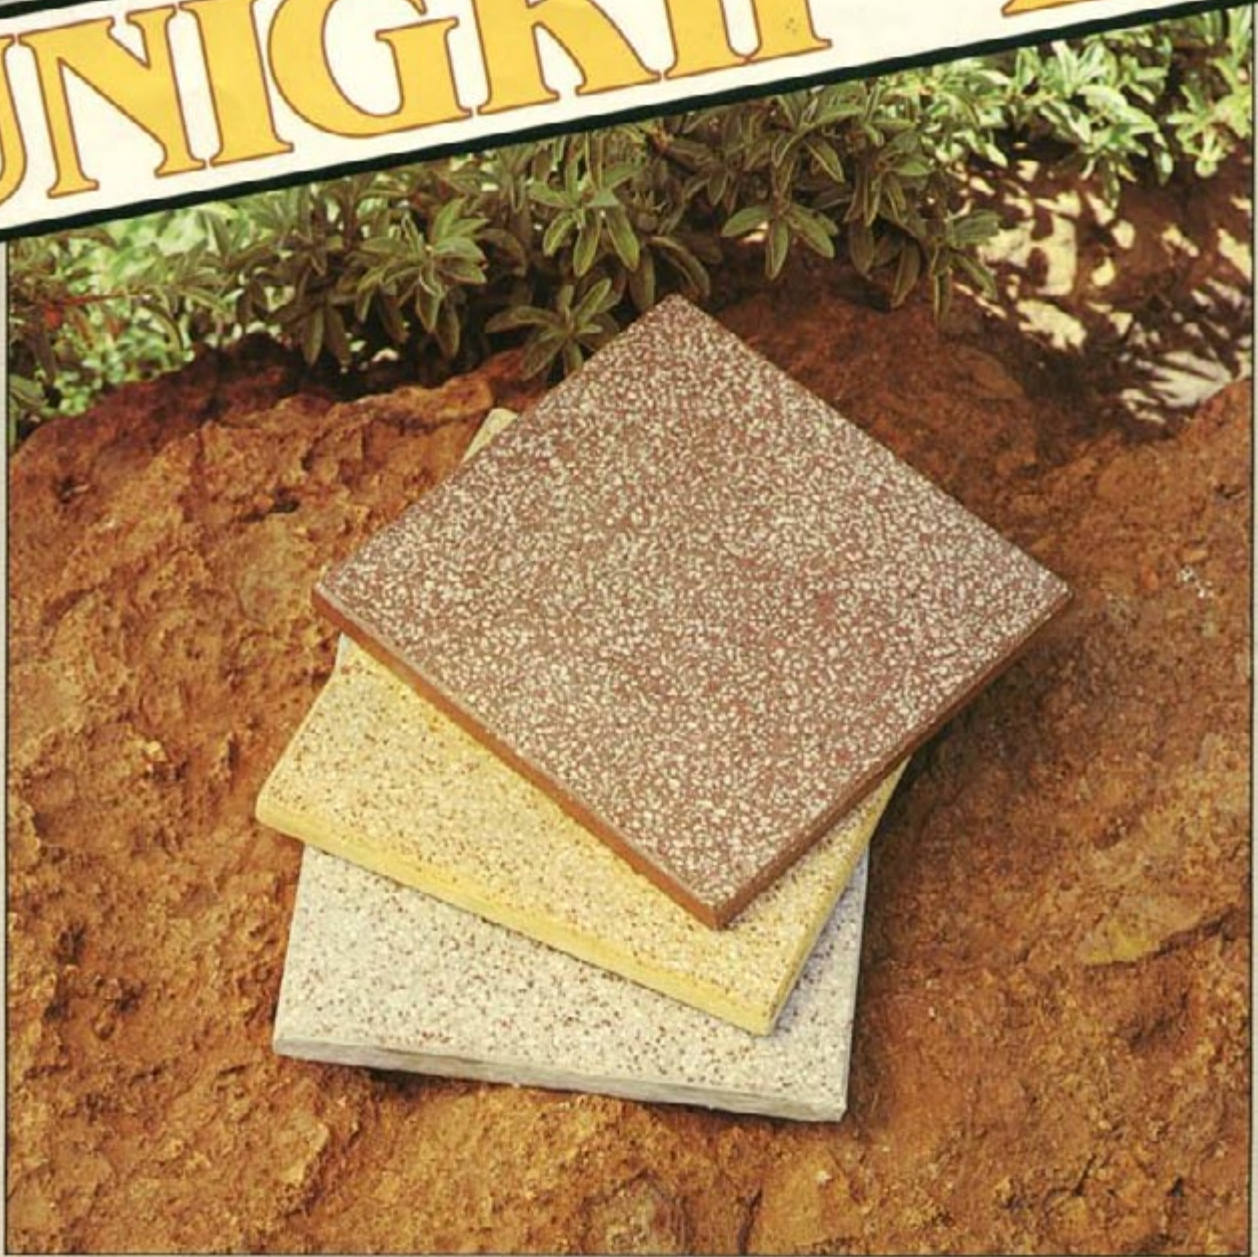

200mm × 300mm × 22mm - 17 tiles per sq. mt./teëls per vk. mt.

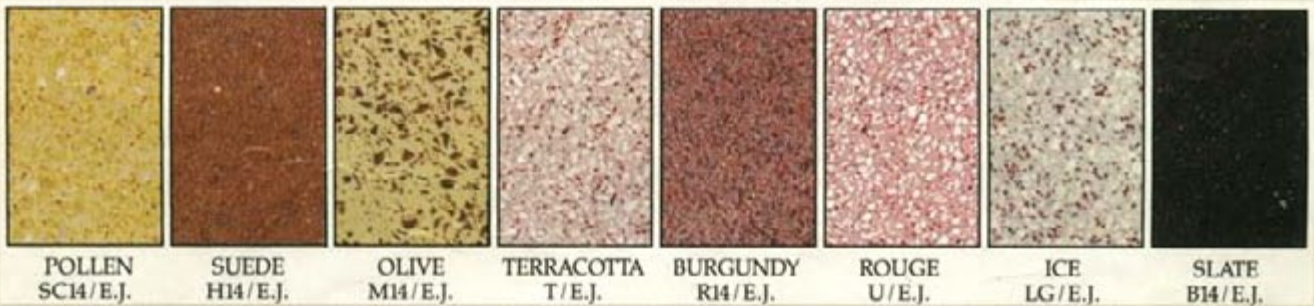

250mm × 250mm × 22mm - 16 tiles per sq. mt./teëls per vk. mt.

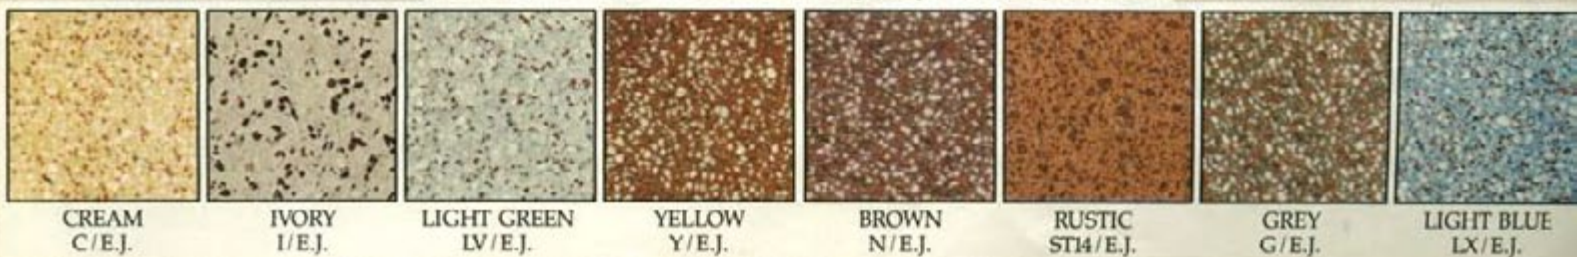


250mm X 250mm X 22mm
200mm X 300mm X 22mm **STANDARD COLOUR RANGE**

CREAM
IVORY
LIGHT GREEN
YELLOW
BROWN
GREY




POLLEN
SC14/E.J.

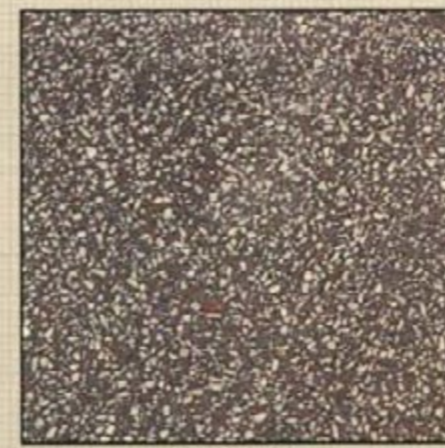


BROWN
N/E.J.




SALMON
P/E.J.

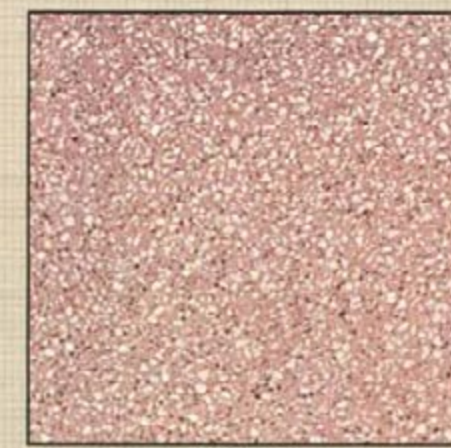

ROUGE
U/E.J.

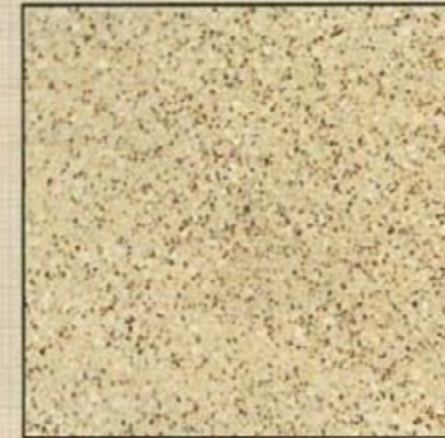

CREAM
C/E.J.

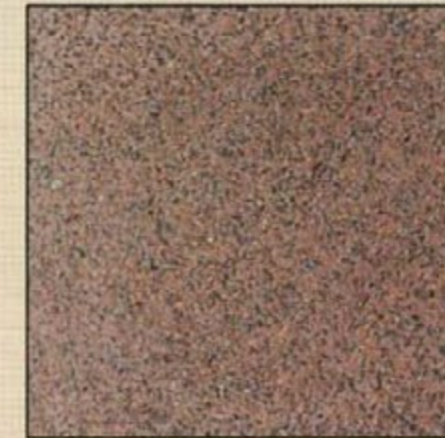


BURGUNDY
R14/E.J.




TERRACOTTA
T/E.J.




LIGHT BLUE
LX/E.J.

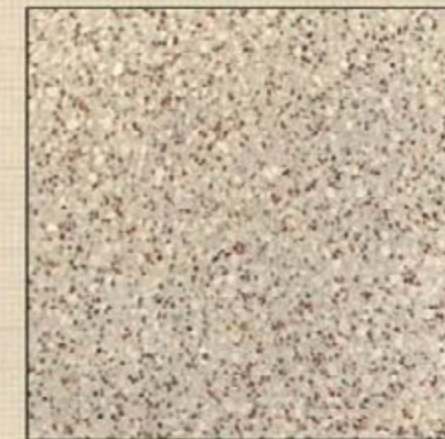

ICE
LG/E.J.

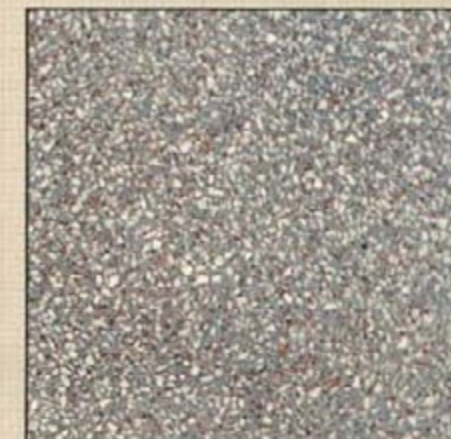


GREY
G/E.J.

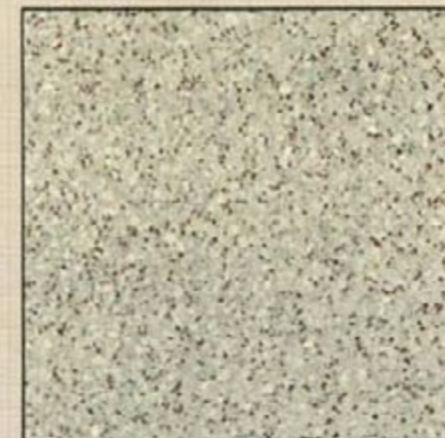

LIGHT GREEN
LV/E.J.



SLATE
B14/E.J.

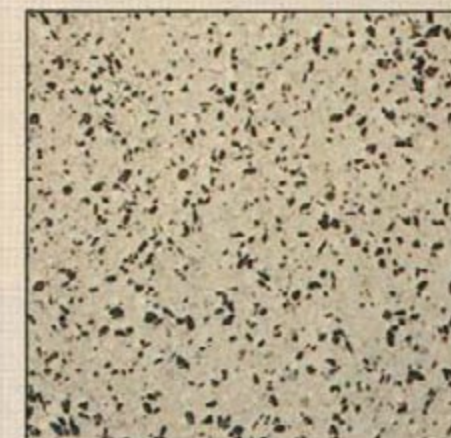


IVORY
I/E.J.

250mm X 250mm X 22mm
200mm X 300mm X 22mm **EXOTIC COLOUR RANGE**


POLLEN
SUEDE
OLIVE
TERRACOTTA
BURGUNDY
ROUGE
ICE
SLATE
RUSTIC



SUEDE
H14/E.J.

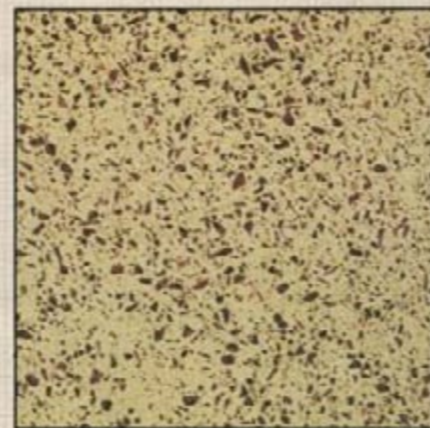

OLIVE
M14/E.J.

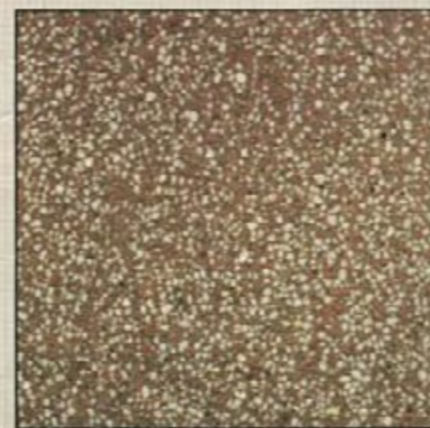

YELLOW
Y/E.J.

Any particular tile size or colour can be ordered outside the above specified colour and size combination ranges at extra charge.

Light Blue colour price available on request.

Enige alternatiewe teël grootte of kleur buite die gespesifiseerde kleur reeks en groote kombinasies kan bestel word teen 'n addisionele koste.

Ligte Blou kleur pryse beskikbaar op aanvraag.

N.B. ALL COLOURS SHOWN ARE APPROXIMATE
L.W. ALLE KLEURE HIEROP GEWYS IS ALLENLIK NAASTEBY

UNIGRIP E.J. TILES

Unigrip Tiles are a range of attractive, durable tiles, suitable for both indoor and outdoor areas. The specially developed, textured surface make Unigrip Tiles the ideal choice for wet or potentially slippery floor areas.

Available in 16 shades and colours. They are the obvious choice for shopping malls, patios, pool surrounds, commercial or domestic floor areas.

UNIGRIP E.J. TEËLS

Unigrip Teëls is 'n uitstaande, duursame reeks teëls, geskik vir beide binne en buite vloer areas. Die spesiale ontwikkelde tekstuur oppervlakte, maak Unigrip Teëls 'n ideale keuse vir nat of potensieel glyerige vloer areas.

Unigrip Teëls is beskikbaar in 16 verskillende kleur skakerings, en is geskik vir winkel-sentrums, patios, swembad omandings, kommersieel en huishoudelike vloer areas.

STORING OF TILES

Do not store tiles outside exposed to dust and dirt. Preferably keep under cover and not in direct contact with soil to avoid possible soiling and crazing.

LAYING OF TILES

As there is a minor variation in thickness, they should be bedded in a soft screed to a true level surface. As Unigrip Tiles are bevel-edged they could be laid closely-jointed, thereby eliminating grouting. Detailed laying instructions are available on request. However we do recommend laying with open joints ± 3 mm wide which are to be grouted with an approved colour grout.

MAINTENANCE

Do not use hydrochloric acid (spirits of salts), or any other acid to clean Unigrip Tiles. Unigrip Tiles are supplied factory sealed, thereby facilitating maintenance and affording protection against staining. In general, use neutral detergents followed by clean water rinsing. However re-sealing with "Union Sealer" may be necessary, especially if efflorescence is prominent.

BERGING VAN TEËLS

Die teëls moet nie buite gestapel en aan stof en grond blootgestel word nie. Om moontlike vlekking en wind barsies te voorkom moet teëls bedek word en nie in direkte aanraking met die grond kom nie.

DIE LÊ VAN TEËLS

Aangesien teëls effens in dikte varieer, behoort hulle in 'n sagte mortel gelê word tot 'n ware gelyke bovlak. Aangesien Unigrip Teëls afgeskuins is, kan hulle dig teenmekaar gelê word, om breiëvulling sodoende uit te skakel. Instruksies vir die lê van teëls is verkrygbaar op versoek. Ons beveel egter aan dat die teëls met ongeveer 'n 3 mm voeg gelê word, wat daarna met 'n goedgekeurde kleur voegbry gevul moet word.

INSTANDHOUDING

Soutsuur of enige ander suur moet nie gebruik word om Unigrip Teëls skoon te maak nie. Unigrip Teëls word fabriek versel verskaaf wat die skoonmaak makliker maak en beskerming verskaaf teen vlekking. Oor die algemeen kan neutrale reinigings middels aangewend word en daarna met skoon water afgespoel word. Herseëling mag egter nodig wees, nadat die teëls reeds gelê is, veral waar effloresensie baie opvallend is.

SPECIFICATIONS

Transverse strength	Greater than 5N/mm ² — complies with BS4131 and CKS208
Water absorption	Below 4% (CKS208)
Abrasion resistance	Complies with CKS208
Moisture movement	Dimensionally stable under varying moisture conditions
Fire resistance	Non-combustible
Linear thermal expansion	Dimensionally stable under varying temperature conditions -10°C to 100°C (EN 103)
Frost	Undamaged after 25 cycles (EN202)
Curvature and warpage	Maximum 0,2mm (CKS208)
Size uniformity:	
• Shape	Squareness maximum 0,2mm (CKS208)
• Dimension tolerances	Maximum 1mm (CKS208 and BS4131)
• Thickness tolerance	Maximum 3mm (BS4131)
Resistance to thermal shocks	Undamaged by variations in temperature -10°C to 100°C (EN104)
Colour fast	Non-fading
Non-conductive	
Impervious to ultra-violet light	
High flexural rigidity	
Nominal sizes	250mm X 250mm X 22mm and 200mm X 300mm X 22mm
Mass	50kg / sq. mt.

SPESIFIKASIES

Dwarslyn sterkte	Hoër as 5 N / mm ² in ooreenstemming met BS4131 en CKS208
Waterabsorbering	Minder as 4% (CKS208)
Skuurbestandheid	In ooreenstemming met CKS208
Vogstabiliteit	Dimensioneel stabiel onder wisselende vogtoestande
Brandweerstand	Nie-vlambaar
Liniêre termiese ekspansie	Dimensioneel stabiel onder wisselende temperatuur toestande -10°C tot 100°C (EN103)
Bestandheid teen bevriëring	Onbeskadig na 25 siklusse (EN202)
Kromming en skeefftrekking	Maksimum 0,2mm (CKS208)
Eenvormigheid van groottes:	
• Vorm	Vierkantigheid maksimum 0,2mm (CKS208)
• Dimensionele toelating	Maksimum 1mm (CKS208 en BS4131)
• Dikte toelating	Maksimum 3mm (BS4131)
Bestandheid teen termiese skokke	Onbeskadig deur wisselings in temperatuur -10°C tot 100°C (EN104)
Kleurvastheid	Verbleik nie
Ondeurdringbaar deur ultraviolet strale	
Hoë buigbare strengheid	
Nominale groottes	250mm X 250mm X 22mm en 200mm X 300mm X 22mm
Massa	50kg / vk. mt.

ACCESSORIES

TOEBEHORE

SKIRTING TILE

250mm X 75mm X 22mm

VLOERLYS TEËL

STEP TILE


250mm X 300mm X 32mm

TRAP TEËL

END SKIRTING TILE

250mm X 75mm X 22mm

ENT VLOERLYS TEËL

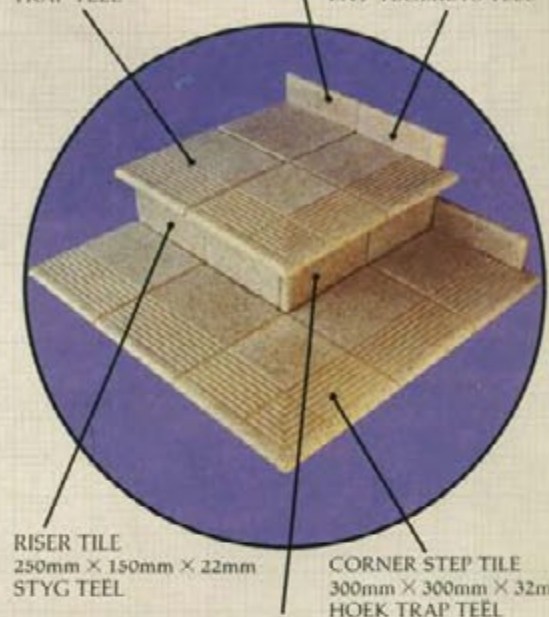

RISER TILE

250mm X 150mm X 22mm

STYG TEËL

CORNER STEP TILE

300mm X 300mm X 32mm

HOEK TRAP TEËL

END RISER TILE

250mm X 150mm X 22mm

ENT STYG TEËL


SINGLE ARRIS

ENKEL RONDE KANT

250mm X 250mm X 22mm

DOUBLE ARRIS

DUBBEL RONDE KANT

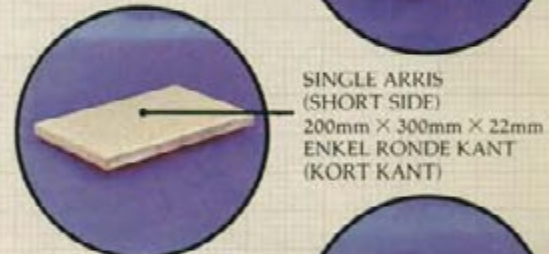

SINGLE ARRIS

(SHORT SIDE)

200mm X 300mm X 22mm

ENKEL RONDE KANT

(KORT KANT)


SINGLE ARRIS

(LONG SIDE)

200mm X 300mm X 22mm

ENKEL RONDE KANT

(LANG KANT)

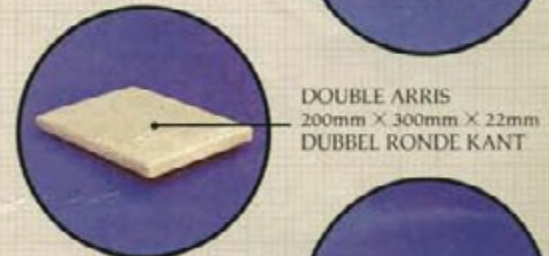

DOUBLE ARRIS

200mm X 300mm X 22mm

DUBBEL RONDE KANT


UNREDED TREAD/

COPING

250mm X 300mm X 32mm

ONGERIBDE TRAP/

AFDEKKING



N.B. ALL COLOURS SHOWN ARE APPROXIMATE

L.W. ALLE KLEURE HIEROP GEWYS IS ALLEENLIK NAASTENBY



TEËLS
TILES

UNION FLOORING TILES (PTY) LTD.

P.O. BOX 84, BEDFORDVIEW 2008.
TELEPHONE (011) 53-7900 (5 LINES). FAX: 453-1259. TELEX 7-40417 S.A.
TEL. ADDRESS "UNION TILES" BEDFORDVIEW.
SHOWROOM: CNR. NORTH REEF ROAD / A.G. DE WITT DRIVE, GERMISTON.
NUMBER CHANGES EXPECTED: TELEPHONE (011) 455-4220-37. FAX (011) 455-5395.



FOUNDER MEMBER OF
THE SOUTH AFRICAN
TERRAZZO TILE
MANUFACTURERS
ASSOCIATION